

MONUMENT RECORD

Corner ID: **CICr_Q05**

Section Corner



Sections 2, 3, 10, & 11- T07N-R01W, 2nd P.M.

Clear Creek Township, Monroe County, Indiana

Section 03 T07N-R01W	Section 02 T07N-R01W
Section 10 T07N-R01W	Section 11 T07N-R01W

MONUMENT: Describe monument set or found (Include material type, scribing, distance above/below grade, dimensions.)
4" x 4" limestone with cut 'X' found 0.8' above grade in rock cairn per current MCS tie sheet

MONUMENT LOCATION SKETCH:

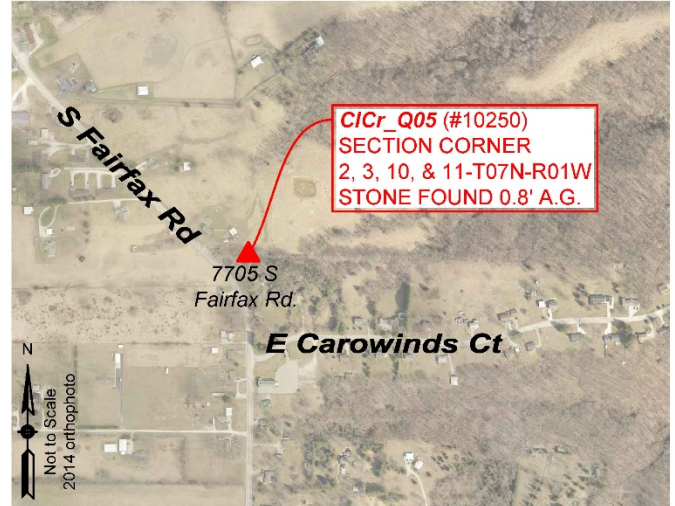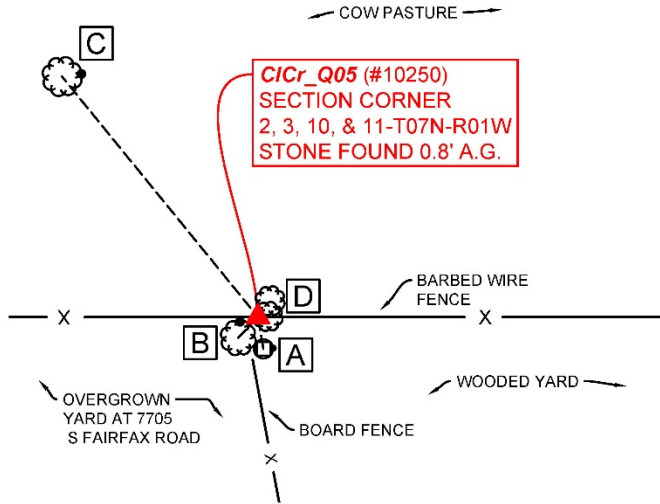

WITNESS MONUMENT TIES

All ties to new Bearing Trees (BTs) are a mag nail set in a 2" metal shiner and hack mark at the root crown (less than 12" above ground) perpendicular to the center of the tree, unless otherwise noted. BT diameters are noted as dbh and are measured approximately 4.5' above ground. Bearings are measured from the monument to the center of the BT, distances are measured from the monument to the mag nail.

ID	BEARING	DISTANCE	DESCRIPTION
Witness A	S 10d E	5.1'	Mag nail and shiner set 0.5' above grade on the east side of a 5.5" x 3.5" treated post
Witness B	S 44d W	4.5'	Mag nail and shiner set in hack 0.8' above grade on the north side of a 25" silver maple tree with a Monroe County "Protect Nearby Survey Marker" sign found 3.6' above grade
Witness C	N 39d W	48.7'	Mag nail and shiner set in hack 0.5' above grade on the east side of a 20" black locust
Witness D	N 87d E	1.6'	Monroe County "Protect Nearby Survey Marker" sign set 4.2' above grade on the west side of a bifurcated 23" silver maple. DBH measured around both trunks.



OFFICE OF THE MONROE COUNTY SURVEYOR • Trohn Enright-Randolph

119 W 7th Street, Bloomington, IN 47404 • 812-349-2570 • surveyoroffice@co.monroe.in.us

Page 1 of 3

MONUMENT RECORD

Corner ID: **CICr_Q05**

Section Corner

Sections 2, 3, 10, & 11- T07N-R01W, 2nd P.M.
Clear Creek Township, Monroe County, Indiana

Section 03 T07N-R01W	Section 02 T07N-R01W
Section 10 T07N-R01W	Section 11 T07N-R01W

PHOTO IDENTIFIED: Photo Date: 3/28/2018



Photo Orientation & Description: CICr_Q05 from above



Photo Orientation & Description: Looking west at CICr_Q05



Photo Orientation & Description: Looking south at CICr_Q05



Photo Orientation & Description: Looking east at CICr_Q05

ORIGINAL OR SUBSEQUENT SURVEY EVIDENCE FOUND: Include, search area or areas, search procedure, etc.

Date of Field work/Search: 3/28/2018 By: RSO & ERS Monument Found: Stone BTs or Reference Objects Found: Monroe County "Protect Nearby Survey Marker" sign found per current MCS tie sheet Project #: CICr_2018 Field Book: 51/58 Equipment: The basis of bearings is Grid North System NAD83(2011)/Indiana West NAVD 88, Epoch 2010.0000, geoid12b_conus.db3, US Survey Feet, derived from GPS observations utilizing a Javad Triumph LS Rover and a Javad Triumph 2 Base. Static observations were post-processed using the JAVAD GNSS Data Online Processing Service (DPOS). Coordinate data was collected with a Javad Triumph LS Rover or radially with a conventional total station (Sokkia Set 510) from points established by GPS. Distances to witness ties were collected with a Leica Disto laser distance meter. Bearings to witness ties were collected with the internal magnetic compass of the Javad Triumph LS and were automatically adjusted to grid north and are approximately shown hereon for reference. Priority should be given to provide distances over bearings. Notes: Old ties were not remeasured

OTHER EVIDENCE: Describe corner location relative to nearby features and how to reach the corner location – note fences, roads, timber cutting lines, mow lines, clearings, plantings, streams, topo changes, etc.

The stone is in a small rock cairn in an east/west barbed wire fence on the south edge of the pasture.

MONUMENT PRESERVATION: Describe work done to preserve existing monument.

Took new ties. Spray painted stone orange.



OFFICE OF THE MONROE COUNTY SURVEYOR • Trohn Enright-Randolph

119 W 7th Street, Bloomington, IN 47404 • 812-349-2570 • surveyoroffice@co.monroe.in.us

MONUMENT RECORD

Corner ID: **CICr_Q05**

Section Corner

Sections 2, 3, 10, & 11- T07N-R01W, 2nd P.M.
Clear Creek Township, Monroe County, Indiana

Section 03 T07N-R01W	Section 02 T07N-R01W
Section 10 T07N-R01W	Section 11 T07N-R01W

THEORY OF LOCATION: *Describe the theory of location for acceptance of this monument. Include monument origin and associated uncertainty.*
The 4" x 4" limestone with cut 'X' found 0.8' above grade was previously witnessed and the Monument Record prepared under the direction of the Monroe County Surveyor, Kevin Enright, on February 25, 2000 and accepted by the Monroe County Surveyor Review Board on May 25, 2000. The 2000 Monument Record accepted the 4" x 4" limestone with cut 'X' and references a survey, Schell Minor Subdivision Site Plan (2000), on file in the Recorder Office, Instrument Number 200000643 and RSID000984.

CERTIFICATIONS:



Date:10/26/2020
Trohn Enright-Randolph
Monroe County Surveyor



Date:10/22/2020
Accepted by the Monroe
County Surveyor Review
Board



OFFICE OF THE MONROE COUNTY SURVEYOR • Trohn Enright-Randolph

119 W 7th Street, Bloomington, IN 47404 • 812-349-2570 • surveyoroffice@co.monroe.in.us

Page 3 of 3

MONUMENT RECORD

State of Indiana - County of Monroe

Section: 11

Township: 7 North

Range: 1 West

Corner ID: Cl Cr Q-05


Monument Description & Remarks: Found 4" x 4" Limestone Monument set by former County Surveyor, Mike Friley, at NW corner of section. Property owner John Schell reported that a rebar and cap had previously been set by Lee Utt, R.L.S. approximately 14' west of the stone, but had been removed by a neighbor.

References On File: Schell Minor Subdivision Site Plan prepared by Phil Tapp, R.L.S., dated 1-31-00; Friley's field drawing, dated 1-11-94.

RECOVERY TIE DRAWING

Field Book 00-01 Page No. 13

USGS Allens Creek Quad

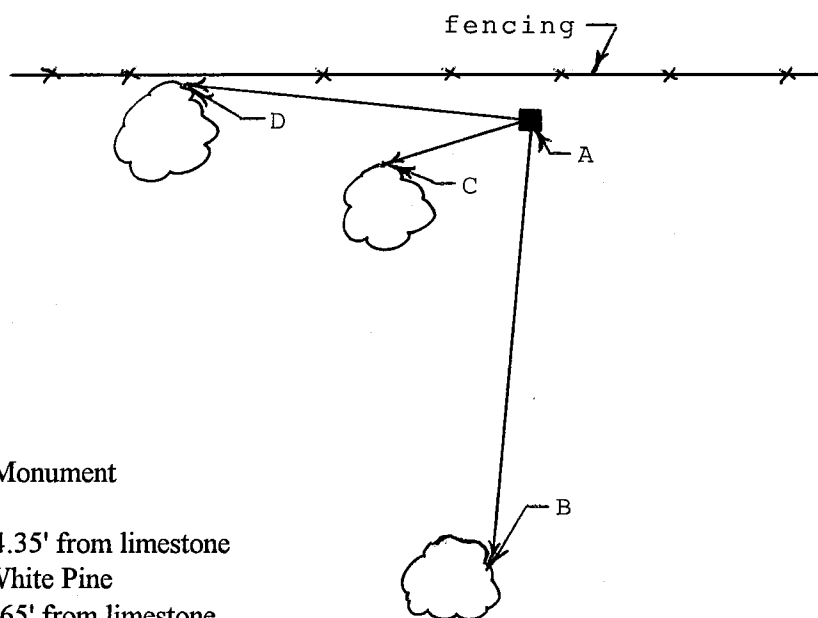

- At Corner

A - 4" x 4" Limestone Monument

**B - South 06° West, 54.35' from limestone
MAG nail in 14" White Pine**

C - South 74° West, 4.65' from limestone
MAG nail in 13" Silver Maple

Survey marker sign set 5' up


D - North 83° West, 25.01' from limestone
MAG nail in 22" Black Locust

Not To Scale

Compass Bearing Magnetic North

I, Kevin P. Enright, Monroe County Surveyor, hereby certify that this document was prepared under my direction in accordance with the provisions of Section 36-2-12-1 of the Indiana Code; and the above data is given under my hand and seal this 25th day of February, 2000.

Kenneth



Administered by the Monroe County Surveyor Review Board

Date: 5-24-00